



GENERAL NOTES:

- SEE SHEET HW-910_01 FOR HARDWARE AND DELINEATOR DETAILS.
- MAXIMUM DESIGN DEFLECTION FOR R-B 350 GUIDERAIL AT THE STANDARD POST SPACING OF 6'-3"(1905) IS 4'-3"(1295). DEFLECTION REQUIREMENT IS MEASURED FROM THE BACK OF POST TO THE FACE OF OBJECT.
- FOR CURVES WITH RADII OF 150'(45.7m) OR LESS, ALL RAIL ELEMENTS SHALL BE SHOP FABRICATED TO THE PROPER RADIUS AND GALVANIZED AFTER FABRICATION. RADIUS RAIL WHEN REQUIRED AND NOTED ON THE PLANS, IS INCLUDED IN THE PAY ITEM FOR GUIDERAIL.
- RAIL HEIGHT WITH CURBING SHALL BE MEASURED FROM THE TOP OF PAVEMENT. ON HIGH SPEED ROADWAYS ($\geq 45\text{mph}$ 72.4kph), 4"(102) CURBING MAY BE USED IN CONJUNCTION WITH GUIDERAIL AND THE RAIL ELEMENT SHALL BE PLACED FLUSH WITH THE FACE OF CURB. ON LOW SPEED ROADWAYS ($< 45\text{mph}$ 72.4kph), 6"(152) CURBING MAY BE USED IN CONJUNCTION WITH GUIDERAIL AND THE RAIL ELEMENT SHALL BE PLACED A MAXIMUM OF 9"(229) BEHIND THE FACE OF CURB.
- THREE BLOCKOUTS MAY BE USED FOR ONE POST ONLY. TWO BLOCKOUTS MAY BE USED FOR A SERIES OF POSTS. THE COST OF ADDITIONAL BLOCKOUTS AND LONGER BOLTS SHALL BE INCLUDED IN THE BID PRICE PER FOOT OF GUIDERAIL. EXTRA BLOCKOUTS AT TRANSITION TO BRIDGE PARAPETS SHOULD BE AVOIDED.
- THE BOTTOM OF WEATHERING STEEL POSTS, WHEN SPECIFIED, SHALL BE GALVANIZED IN ACCORDANCE WITH ASTM-A-123 TO PROVIDE A 2"(51) EXPOSED GALVANIZED COATING ABOVE THE GROUND.
- W-BEAM GUIDERAIL MAY BE PLACED 1'(305) OR MORE FROM THE EDGE OF PAVEMENT ONLY ON SLOPES 10:1 OR FLATTER AND WITHOUT CURBING. IF THE RAIL IS INSTALLED WITHIN 2'(610) OF THE EDGE OF PAVEMENT, THE RAIL HEIGHT IS MEASURED FROM THE SHOULDER SLOPE EXTENDED TO THE RAIL. IF THE RAIL IS INSTALLED BEYOND 2'(610) FROM THE EDGE OF PAVEMENT, THE RAIL HEIGHT IS MEASURED FROM THE GROUND DIRECTLY BELOW THE RAIL.
- ALL R-B 350 GUIDERAIL TYPES INSTALLED ON EXPRESSWAYS AND RAMP SHALL USE CLASS B, TYPE-II (10 GAUGE) W-BEAM RAIL ELEMENTS.
- 20" (507) DIA. EXCAVATED HOLE SHALL BE BACKFILLED WITH SUITABLE MATERIAL, OR GRANULAR FILL COMPACTED IN 6" (150) LIFTS BEFORE DRIVING POST OR POSTS MAY BE SET IN EXCAVATED HOLE AND BACKFILLED WITH CONTROLLED LOW STRENGTH MATERIAL (CLSM). 8" (203) DIA. HOLE SHALL BE BACKFILLED WITH SUITABLE MATERIAL.
- AS DIRECTED BY THE ENGINEER AND WHERE PAVEMENT FOR RAILING IS NOT BEING INSTALLED, PROCESSED AGGREGATE SHALL BE INSTALLED FROM THE PAVEMENT EDGE OR BACK OF CURB TO A MINIMUM OF 2' (610) BEHIND THE GUIDERAIL POST AND COMPACTED IN 6" (150) LIFTS.
- MINIMUM RAIL HEIGHT FOR NEW CONSTRUCTION SHALL BE 29" (737) \pm 1" (25).

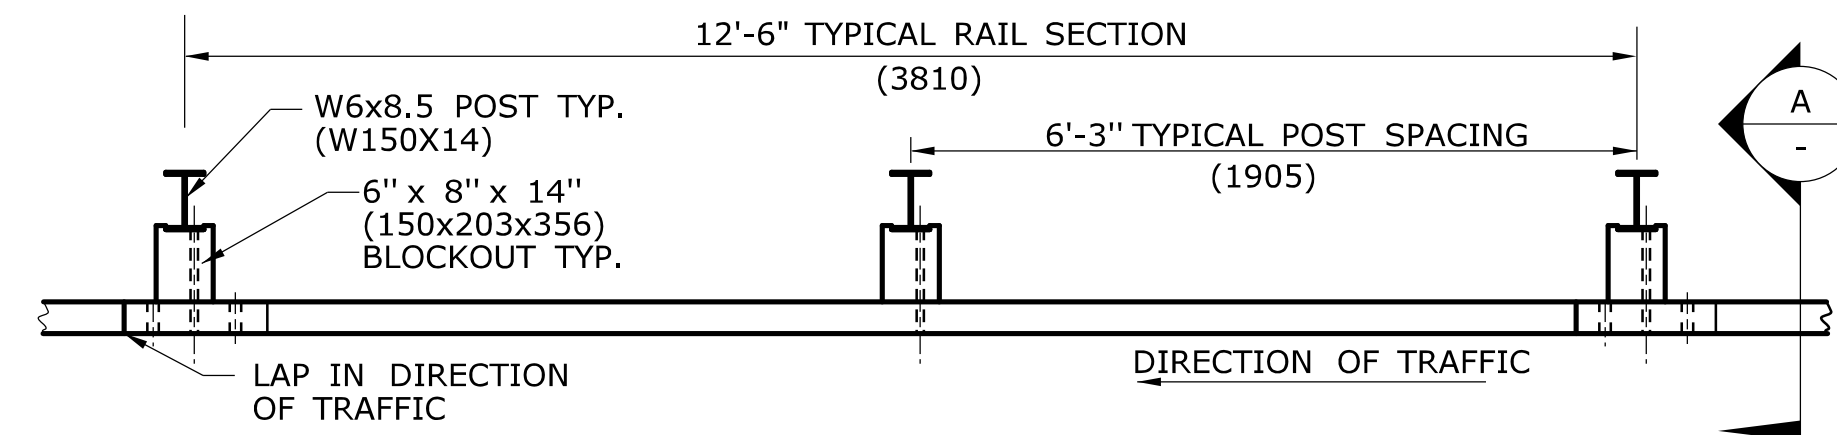

PLAN

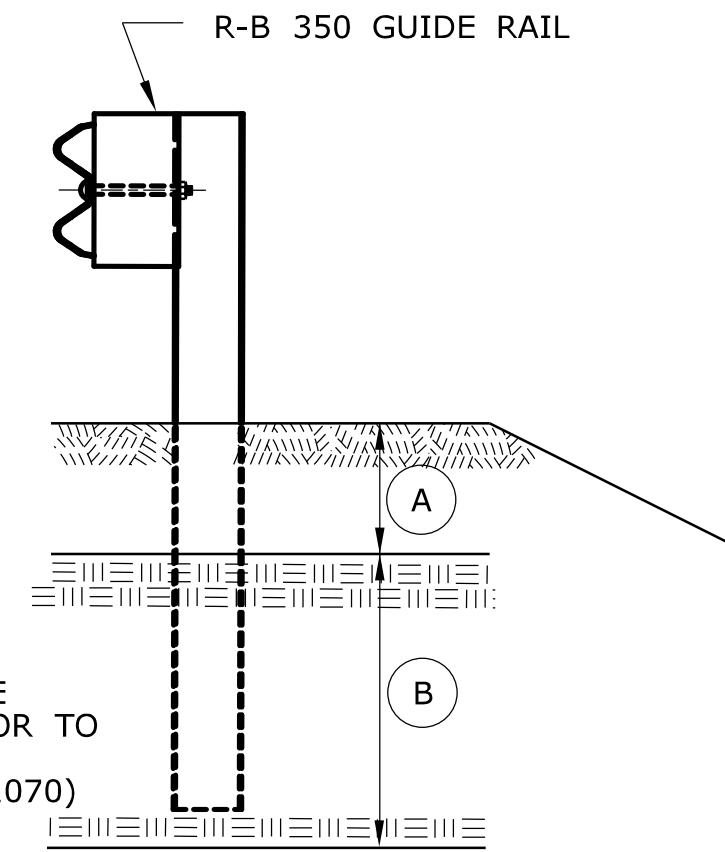


ELEVATION

(SEE NOTE 9)


CONDITION 1 :
IF SOIL DEPTH IS $\leq 18"$ (457) DEEP (A) DRILL 20" (507) DIA. HOLE 24" (610) INTO LEDGE. (B)

CONDITION 2 :
IF SOIL DEPTH IS $> 18"$ (457) DEEP (A) DRILL 8" (203) DIA. HOLE 1' (305) INTO LEDGE (B) OR TO THE DEPTH OF FULL EMBEDMENT OF 42 1/8" (1070) WHICHEVER IS LESS.

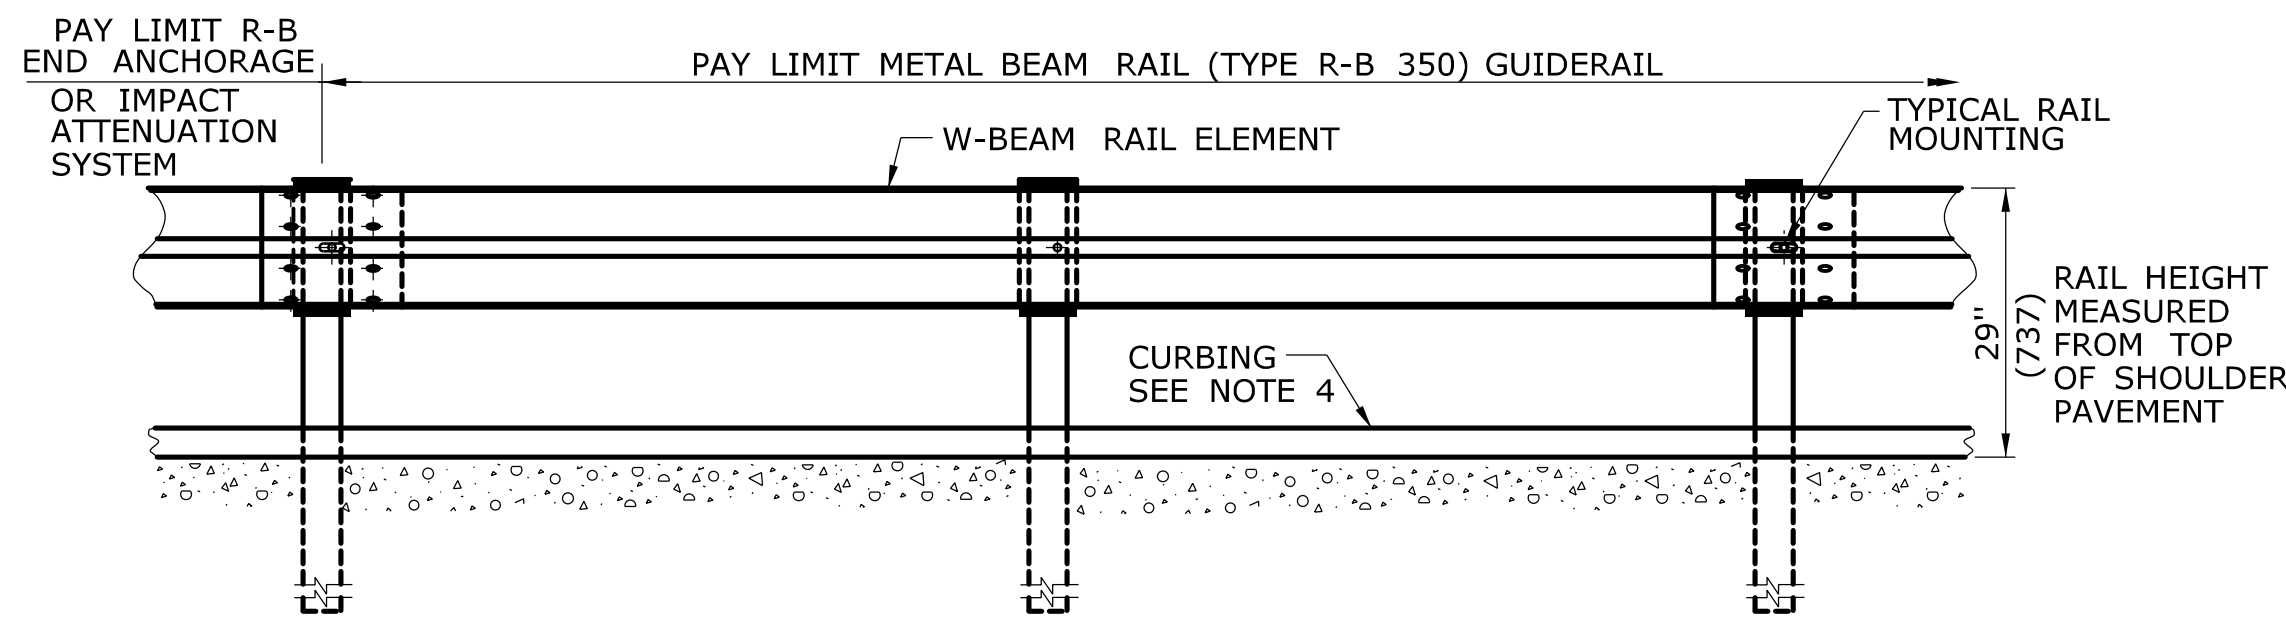

ELEVATION

METAL BEAM RAIL (TYPE R-B 350)

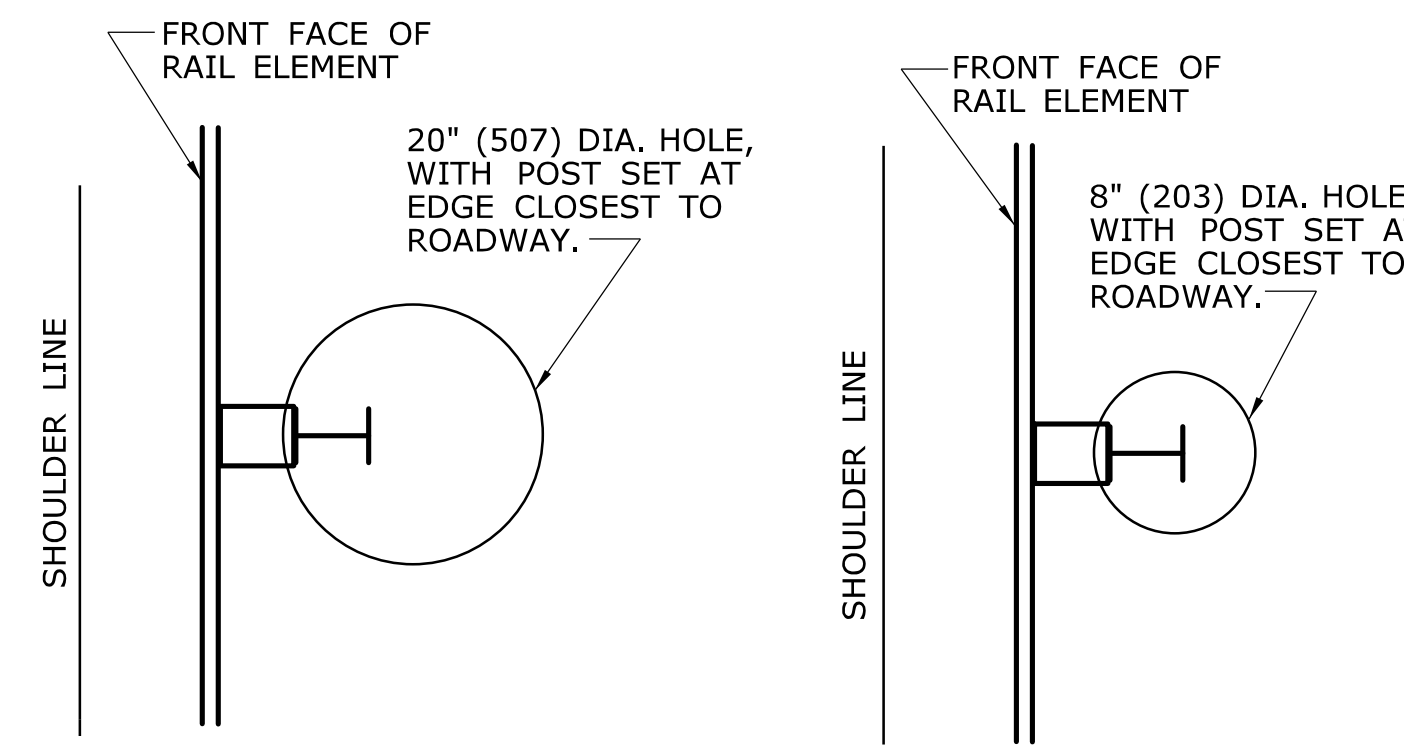


PLAN CONDITION 1

(SEE NOTE 9)


PLAN CONDITION 2

(SEE NOTE 9)

DRILLING IN ROCK FOR GUIDERAIL POSTS

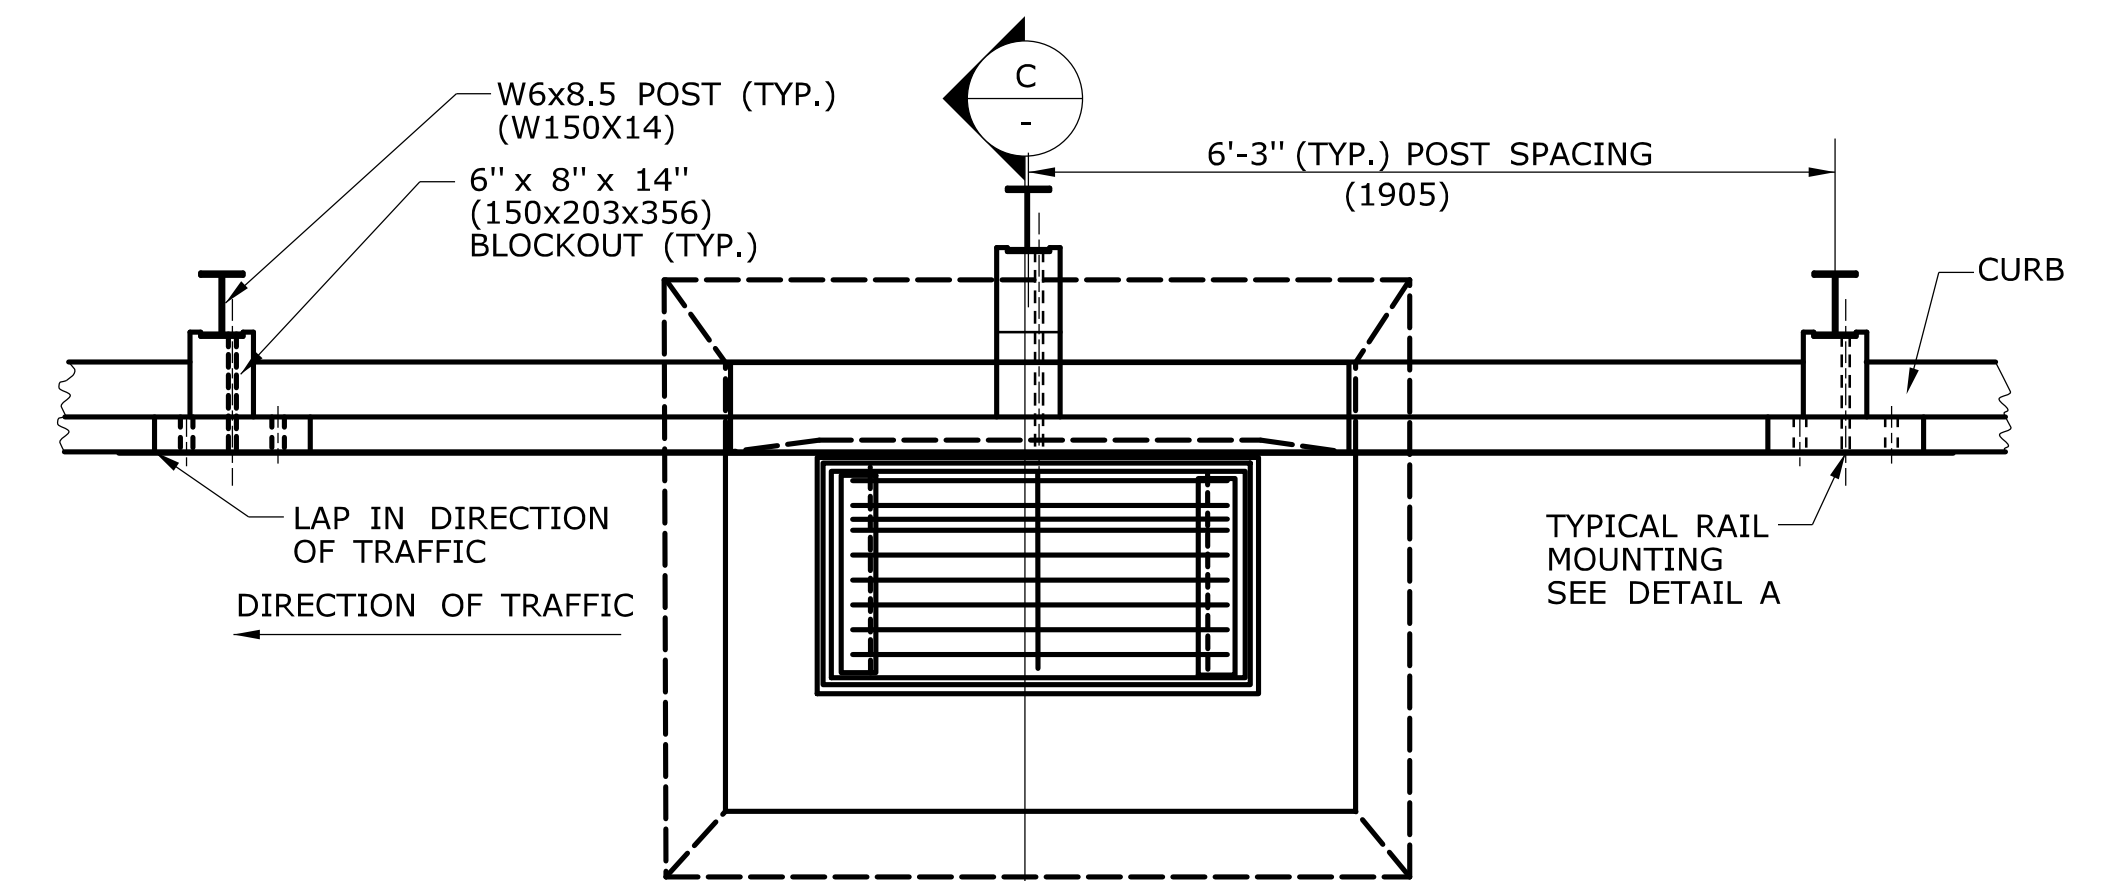


PLAN

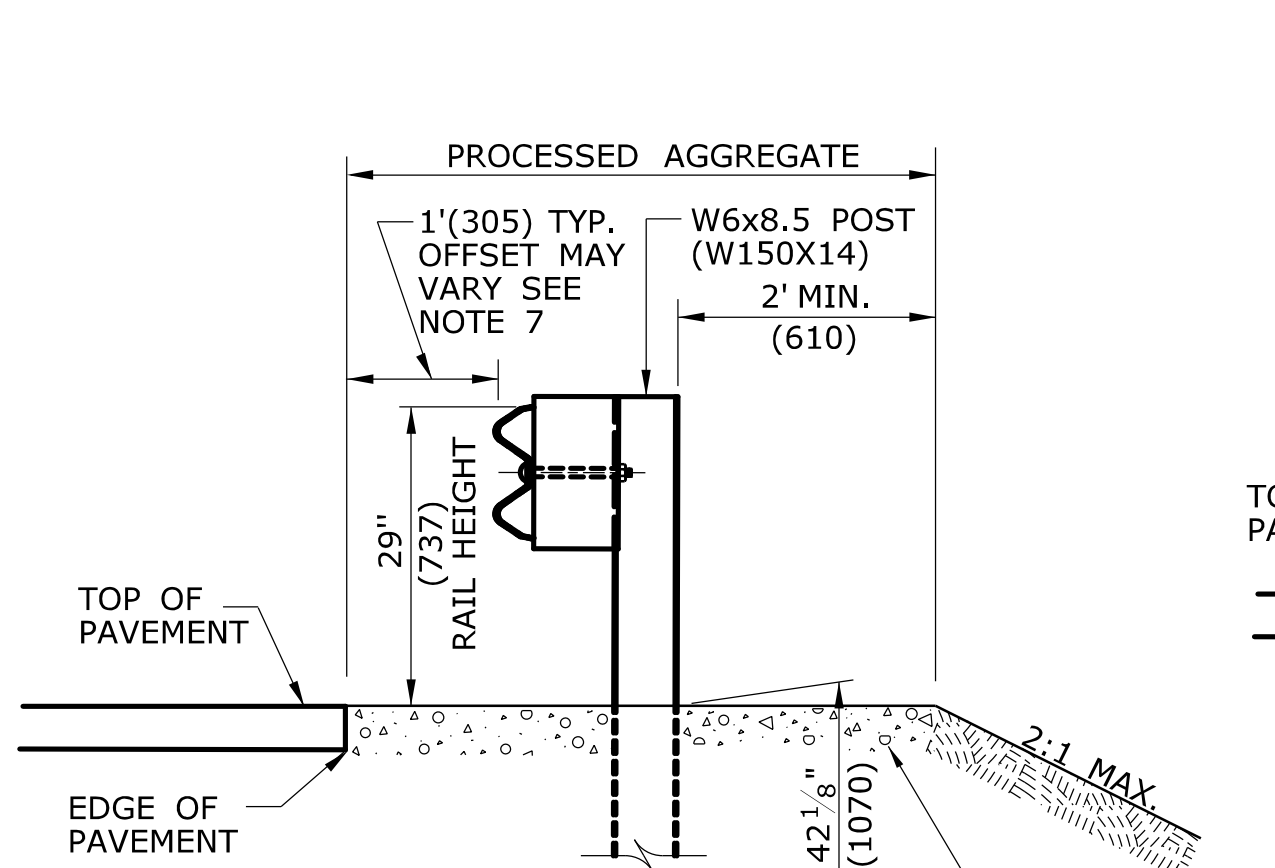


SECTION A

NO CURB APPLICATION

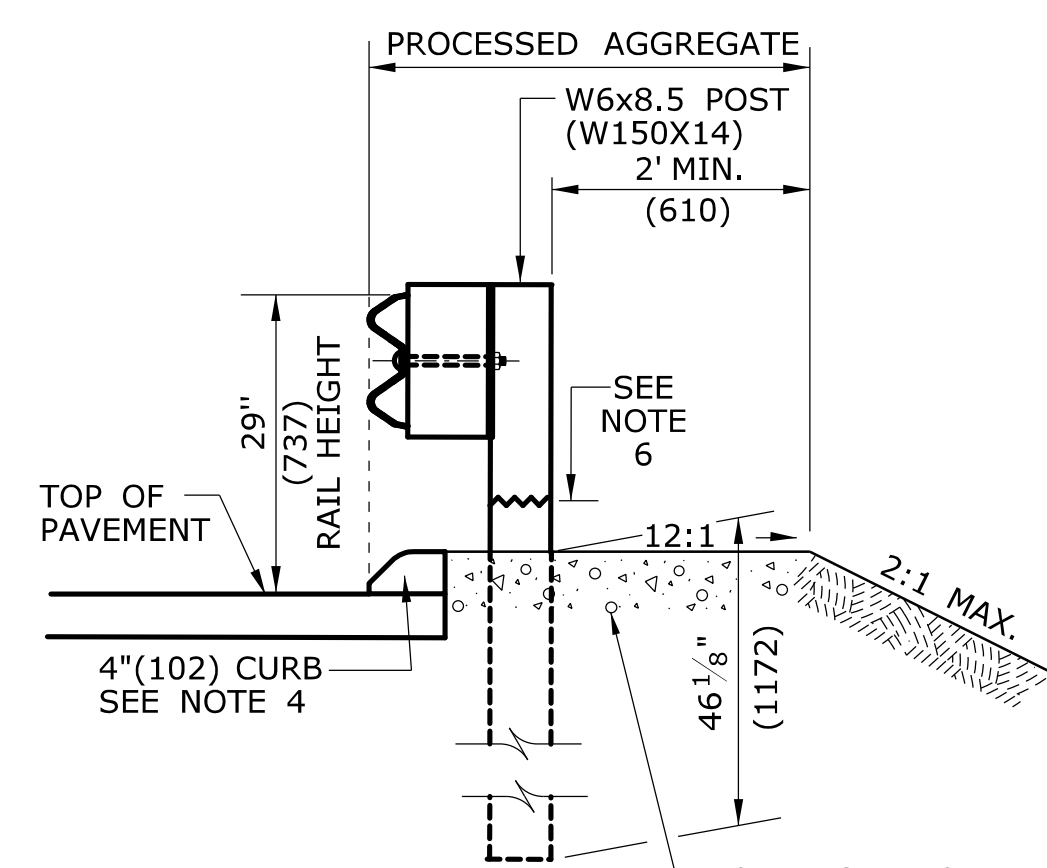


SECTION A

CURB APPLICATION

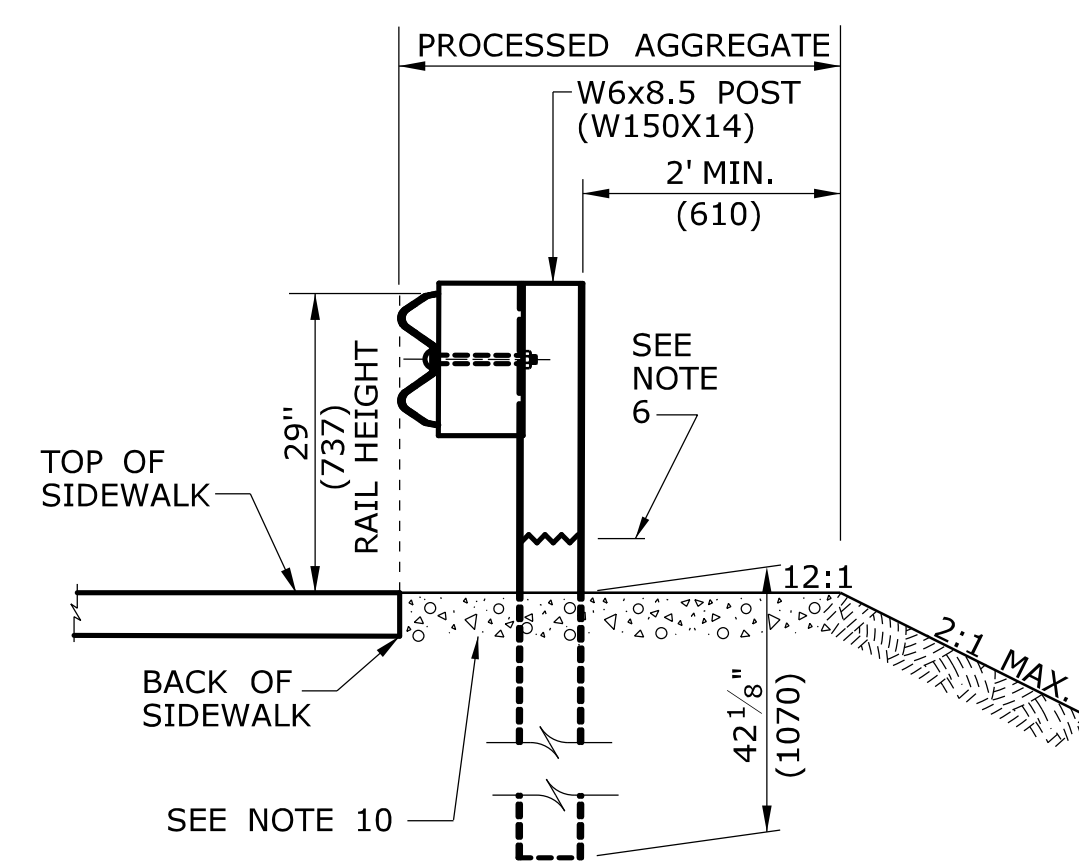


SECTION A

SIDEWALK APPLICATION

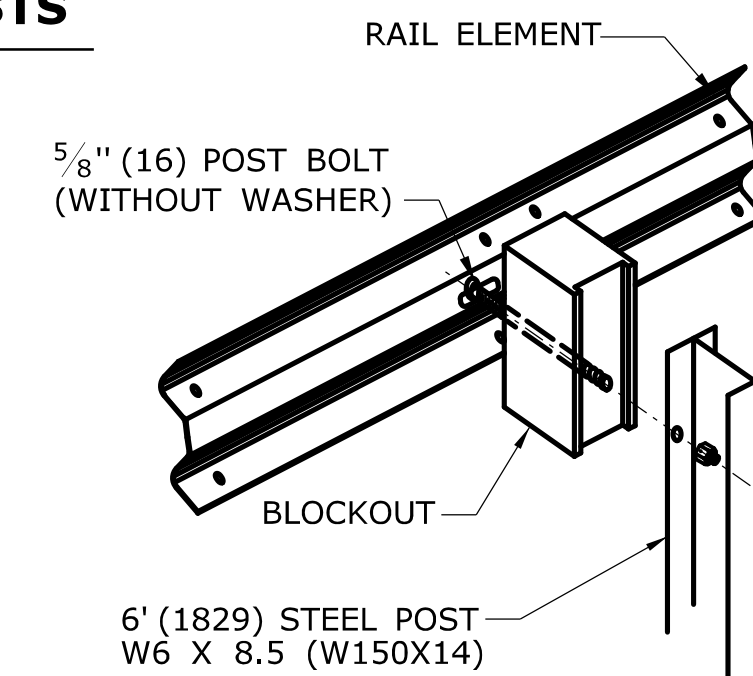

DETAIL A RAIL MOUNTING

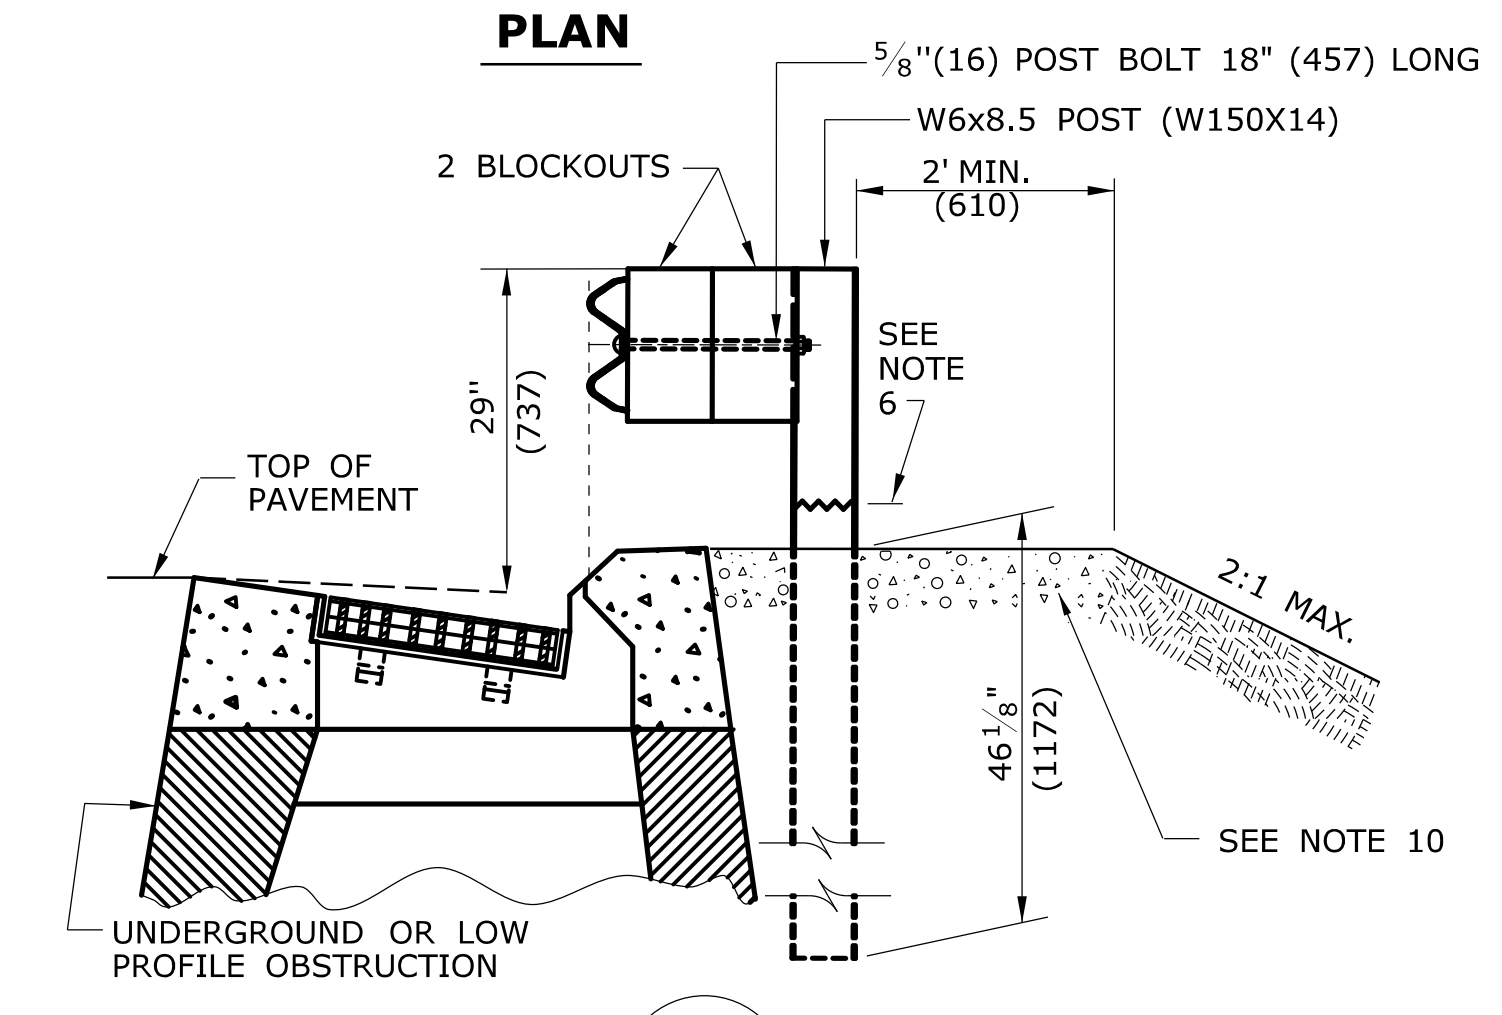

SECTION C

MULTIPLE BLOCKOUT APPLICATION (MAY BE USED TO AVOID UNDERGROUND OR LOW PROFILE OBSTRUCTION)

ALL METRIC DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS OTHERWISE NOTED.

REV.	DATE	REVISION DESCRIPTION
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

NOT TO SCALE

STATE OF CONNECTICUT
DEPARTMENT OF TRANSPORTATION

SUBMITTED BY: _____ NAME/DATE/TIME: _____
 APPROVED BY: _____ NAME/DATE/TIME: _____

CTDOT
STANDARD SHEET
OFFICE OF ENGINEERING

STANDARD SHEET TITLE:
METAL BEAM RAIL
(TYPE R-B 350) GUIDERAIL

STANDARD SHEET NO.:
HW-910_02